


Different sight distances are required for yield or signal controlled intersections. Contact road agency's (City, R.C.O.C., or M.D.O.T.) design division for determining corner sight distance at yield or signalized approaches.

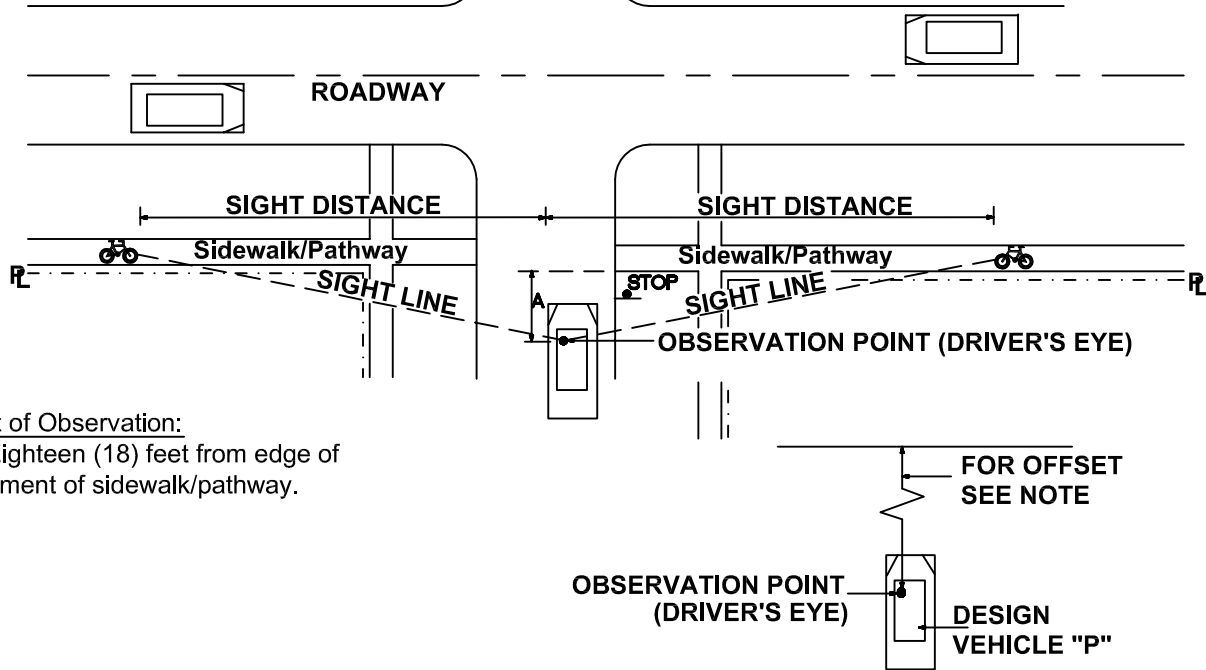

Point of Observation:

(A) Eighteen (18) feet from edge of pavement of sidewalk/pathway.

The point of vision shall be from the height of eye, 3.5 feet above the proposed intersecting elevation to a height of object 3.5 feet above the existing or proposed road centerline and shall be continuously visible within the specified limits.

MINIMUM CORNER SIGHT DISTANCE FOR STREETS AT INTERSECTIONS	
PATHWAY GRADE APPROACHING INTERSECTION (%)	MINIMUM SIGHT DISTANCE IN FEET, BOTH DIRECTIONS
0	135
-1	140
-2	145
-3	150
-4	160
-5	165
-6	175
-7	190
-8	205

NOTES

1. Any deviation from given data requires an engineering study approved by the road agency (City, R.C.O.C., or M.D.O.T.) in accordance with the latest edition AASHTO Guide for the Development of Bicycle Facilities.
2. This design guide also applies to new Permit and Plat construction projects.
3. The bicycle design speed used in the chart is 18 MPH.
4. Approach pathway slope greater than 8% is not allowed due to ADA compliance.
5. Existing site conditions may require an engineering study to determine sight distance.

CITY OF ROCHESTER HILLS STANDARD DETAIL FOR: Sight Distance Pathways					
DRAWN BY: B. SMITH	FILE NAME: CIRC DRV	PLAN DATE: 8/28/1996	REV. 4/12/2012	REV. 3/15/2014	REV.
APPROVED BY: PAUL SHUMEJKO, P.E., PTOE CITY TRANSPORTATION ENGINEER			NOT TO SCALE		SHEET 2 OF 2