2021 Concrete Road Replacement Program #2_Inventory - City File #E21-005

Loc ID #	Street(s)	Subdivision	Sec #	Approx. Street Length in feet (not a pay item)	Conc Pavt, Rem (square yard)	Conc Pavt, Nonreinf, 8 inch (square yard)	Epoxy Coated Lane Ties, #5 (each)	Epoxy Coated Dowel Bars, #8	Conc Driveway, Rem (square yard)	Conc Driveway, Nonreinf, 6 inch (square yard)	HMA Driveway, Rem (square yard)	HMA Driveway, 6 inch (square yard)	21AA Aggregate Base (square yard)	Erosion Control, Inlet Protection, Fabric Drop (each)	Drainage Structure, Adjust (each)	Drainage Structure, Reconstruct (vft)	Drainage Structure, Recondition (each)	EJIW 7065 Catch Basin Curb Inlet (as directed)	EJIW 7045M4 Grate (as directed)	EJIW 5100 Catch Basin Inlet (each) (as directed)	EJIW 7060 T1 Back (each)	Sanitary Structure, Adjust (each)	6 inch Edge Drain (Modified) (lineal foot)	Special Crosswalk Marking	HMA Pathway or Sidewalk, Rem (square feet)	Conc Pathway or Sidewalk, Rem (square feet)	Sidewalk Ramp, Conc 6 inch (square feet)	Sidewalk Ramp, Conc 4 inch (square feet)	Detectable Warning Surface (square feet)	Topsoil Surface, 2 inch & Seeding, Mixture THW w/ Mulch (station)
LR	**Local Roads**																													
	Hidden Ln	Avon Hollow	16	955	2,870	2,870	382	0	540	540	0	0	3,100	5	5	5	5	0	0	0	5	0	1500	0	0	0	0	0	0	6.80
	Thornridge Ct	Heatherwood Village No. 3	14	245	787	787	98	25	216	216	0	0	850	1	1	1	1	0	0	0	0	0	643	0	0	0	0	0	0	3.00
	Arlington Dr & Whitney Dr	Heatherwood Village No. 2	14	780	2,325	2,325	312	100	432	432	0	0	2,511	8	6	6	6	0	4	0	4	0	1560	0	0	0	0	0	0	7.80
	Kirkton Ct	Heatherwood Village No. 1	14	455	1,360	1,360	182	50	324	324	0	0	1,469	4	3	3	3	0	0	0	2	0	910	0	0	0	0	0	0	4.55
	Lexington & Turnbury Rd	Eddington Farms	23	1,321	3,957	3,957	528	25	936	936	36	36	4,274	12	12	12	12	0	3	0	0	0	2642	1	75	0	25	50	10	13.21
	Crestline Ln	Avon Hills Village No. 5	22	812	2,487	2,487	325	75	756	756	0	0	2,686	6	6	6	6	0	0	0	0	0	1624	0	0	0	0	0	0	8.12
	Slade Ct	Cumberland Hills No. 1	27	530	1,583	1,583	212	25	324	324	0	0	1,710	2	2	2	2	0	0	0	0	0	1060	0	0	0	0	0	0	5.3
	Daylilly Dr	Wildflower	35	1,415	4,026	4,026	566	25	1152	1152	0	0	4,348	11	11	11	11	0	0	4	0	0	2830	0	0	50	25	25	10	14.15
	Added-Brittany Ct	Avon Hollow	16	361	1,160	1,160	144	50	216	216	0	0	1,253	2	3	3	3	0	0	0	0	0	722	0	0	0	0	0	0	3.61
	LR Total:			6,874	20,555	20,555	2,750	375	4,896	4,896	36	36	22,199	51	49	49	49	0	7	4	11	0	13,491	1	75	50	50	75	20	67

ROCHESTER HILLS MICHIGAN

Brittany Court
1160 SYD
361 FT Long

Approximately $115,000

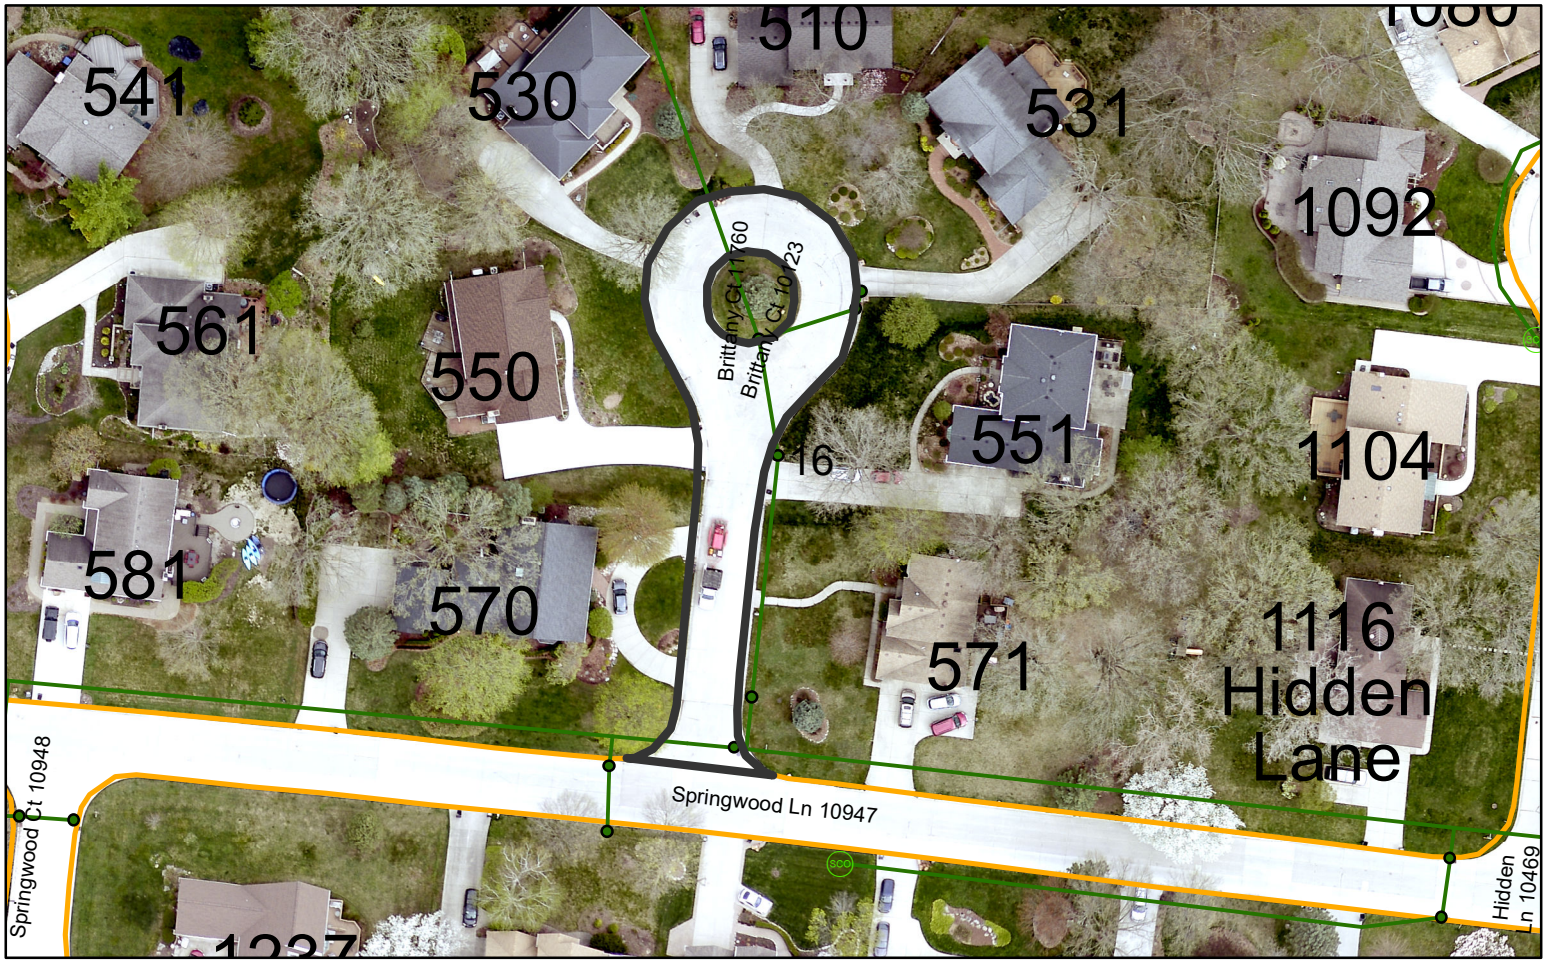

N
W E
S